

Quick Start Guide

„Enterprise Mobile Manager 2014“

Bring your own Device

Increase the productivity and satisfaction of your employees.



QUICK STEPS3
Three Initial Steps for the Enterprise Mobile Manager 20143
Upload Apple Push Certificate.....4
Add a User and a Device.....5
Create or edit a Group Profile6
Assign a Group Profile.....7



QUICK STEPS

Three Initial Steps for the Enterprise Mobile Manager 2014

1. To manage iOS devices upload an **Apple Push Certificate** in "General Settings" > "iOS Configuration".
2. **Add a User and a Device.** Using the gear icon whilst a group is selected, click "Add User". To add a device, select the user the device belongs to, press the gear icon and click "Add and Enroll a device".
3. To push a change in a Device- or Group Profile configuration to the device, click on "Save" and "Assign now" at the bottom right of the console.

Optional:


4. **Create a Group Profile.** Go to "General Settings" > "iOS Profiles" and select the gear button on the top left.
5. **Assign a Group Profile** to a group. Select a group and choose the profile on the right side. Save the setting with the "Save" option at the bottom right of the console.

Upload Apple Push Certificate

To manage iOS devices upload an **Apple Push Certificate**, this is only required on first install of the console.

Go to "General Settings" > "iOS Configuration" (Please follow the instructions in the console.).

1. Enter your Apple-ID.

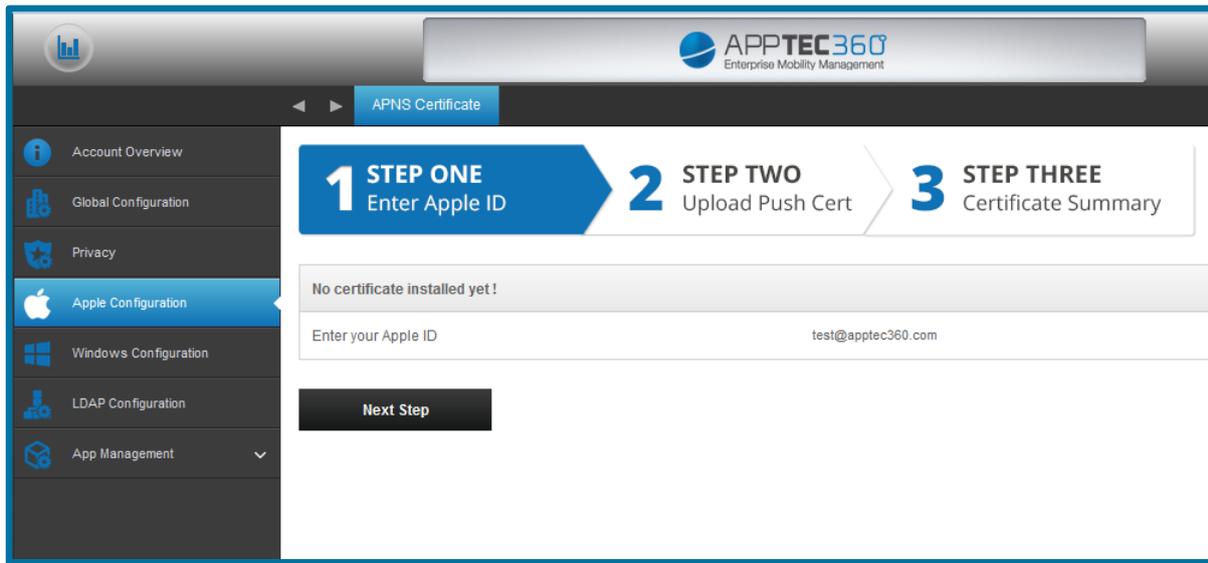


2. Click "Submit" and download the "signedpushcertificate.txt".
3. Upload the "signedpushcertificate.txt" to the Apple Push Certificates Portal.
4. Download the .pem file from Apple Push Certificates Portal page and upload it into the EMM console.


Now you are ready to enroll iOS devices and send configurations Over-the-Air.

Add a User and a Device

In the MDM console, select a group. Click on the Gear icon and Select "Create a user".

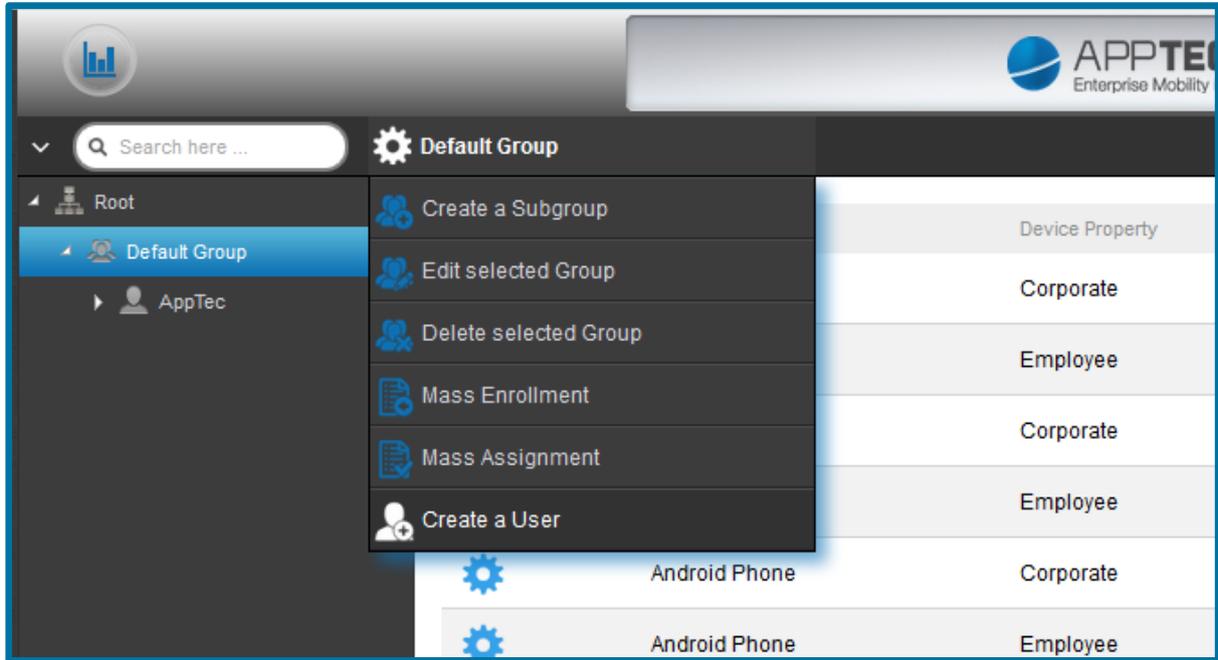


Select the User to whom the device belongs to. Click on the gear icon and select "Add and enroll a device".

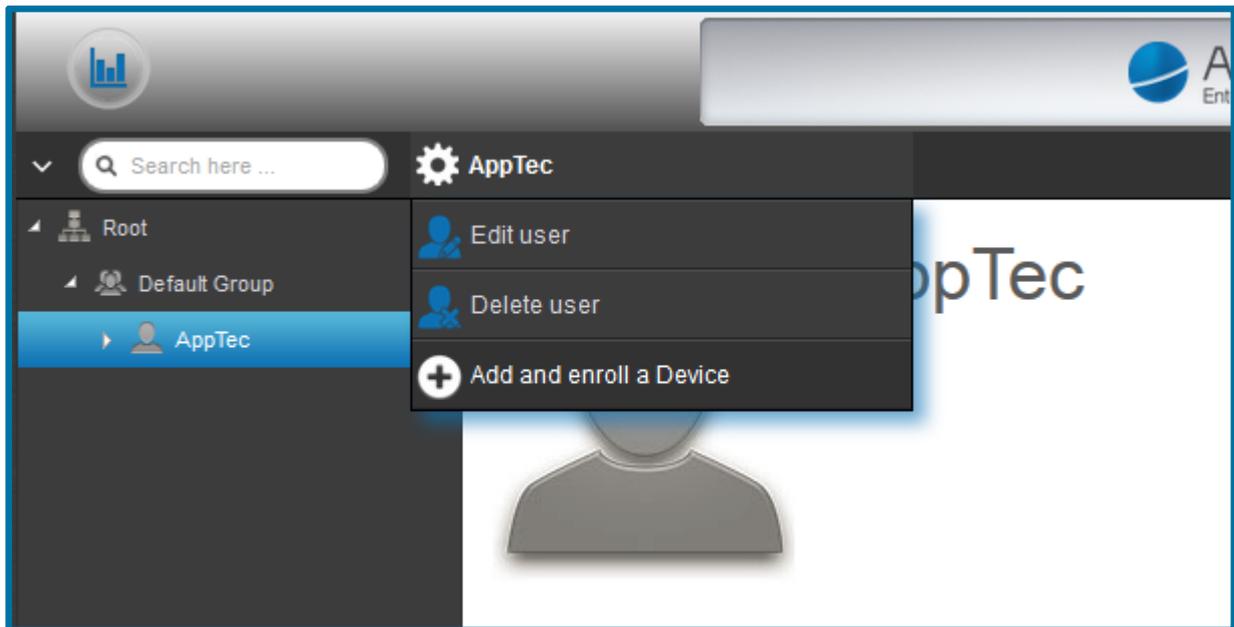


Assign a configuration

To assign a configuration, edit some settings in the console click **"Save Changes"** and **"Assign now"** at the bottom of the console.

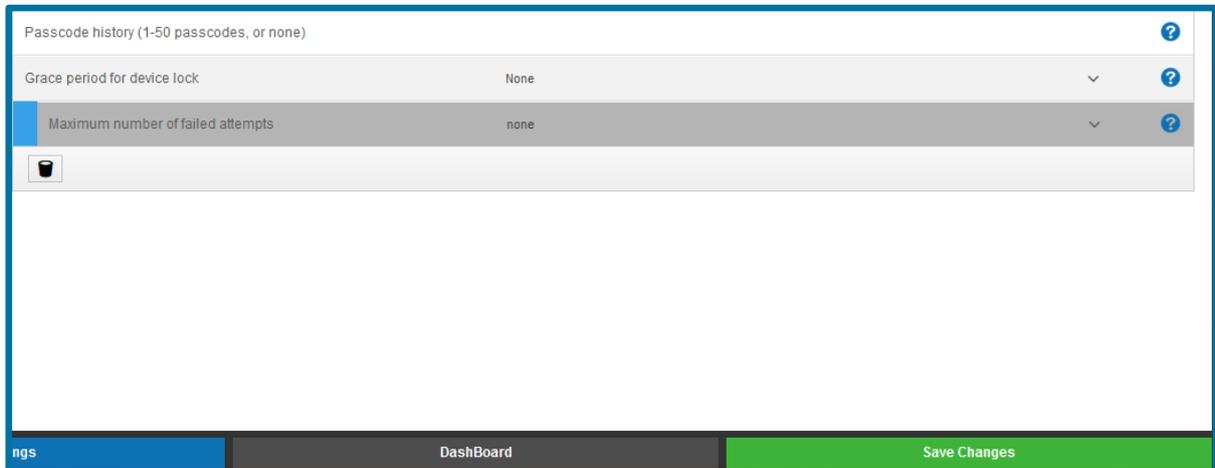

Create or edit a Group Profile


1. Select a group in the navigation on the left. Then press the Gear button on the left side in the profile list.

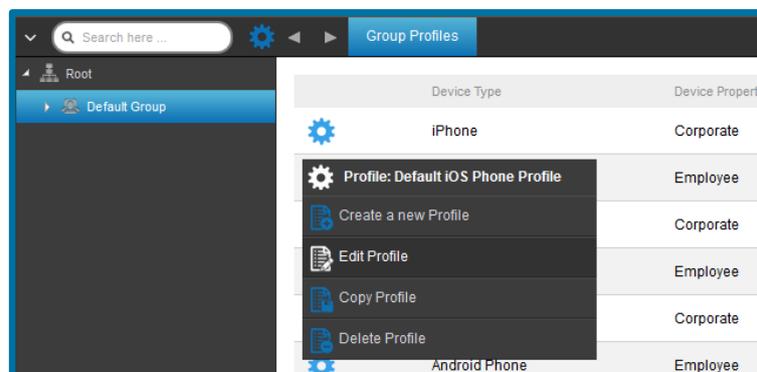

2. Define a name for the Group Profile.
3. Define the required settings and press the **"Save"** button.
4. To assign a group profile or individual configuration click on **"Assign now"** at the bottom right of the console.

Assign a Group Profile

1. Select a group on the main page and choose the required profile on the right side. Save the changes.

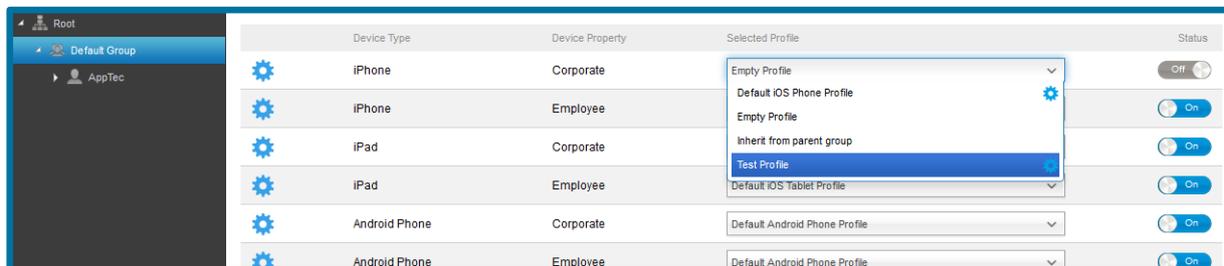

The configuration for the group will be inherited from the top down based on the hierarchy path. You can use the default Group profile setting or you can create additional device specific settings as needed.

CONTACT

Questions? Simply contact us at:

support@apptec360.com

DISCLAIMER

© 2014 AppTec GmbH

The information provided in this document does not warrant or assume any legal liability or responsibility for the accuracy and completeness. This document is meant to provide a general structure on the discussed issue. Thus it is not meant to document specific licensing terms. Please refer to your license agreements, available product licensing information and other sources provided by respective software vendor to review valid terms and conditions for license compliance reconciliation.

This documentation is protected by copyright. All rights reserved by AppTec GmbH. Any other usage, in particular, dissemination to third parties, storage within a data system, distribution, editing, speech, presentation, and performance are prohibited. This applies for the document in parts and as a whole. This document is subject to changes.

Reprints, even of excerpts, are only permitted after written consent of AppTec GmbH. The software described in this documentation is continuously developed, which may result in differences between the documentation and the actual software. This documentation is not exhaustive and does not claim to cover the complete functionality of the software.